

DIGITAL INDICATOR

Totalcomp T500 Series



High quality, full-featured Digital Indicators from Totalcomp

- ✓ **NTEP approved for 5,000 divisions.**
- ✓ **Simple configuration with front panel push-button access.**
- ✓ **Full duplex RS-232 serial port.**
- ✓ **Drives up to four 350 load cells.**
- ✓ **Easy to read six digit LCD or LED Display shows up to 50,000 graduations.**
- ✓ **Available in plastic or stainless steel casing.**
- ✓ **Wall or table mountable stainless steel swivel stand.**



Totalcomp[®] Scales & Components

99 Reagent Lane • Fair Lawn, New Jersey 07410

Fax: 201-797-2287 • Toll Free Fax: 888-797-2288 • Phone: 201-797-2718 • Toll Free Phone: 800-631-0347

Email: sales@totalcomp.com • Website: www.totalcomp.com

SPECIFICATIONS




TOTALCOMP DIGITAL INDICATOR

T500 (LCD display)

T500E (Green LED display)

T500ESS (Stainless Steel)

T500ESS

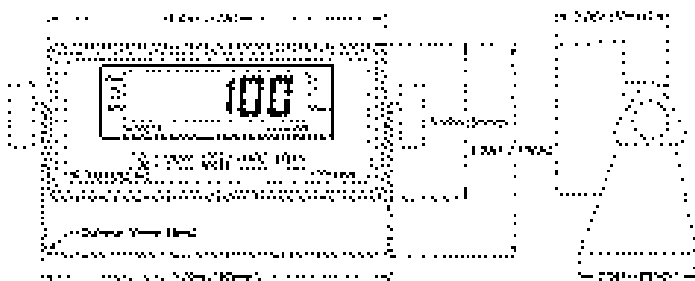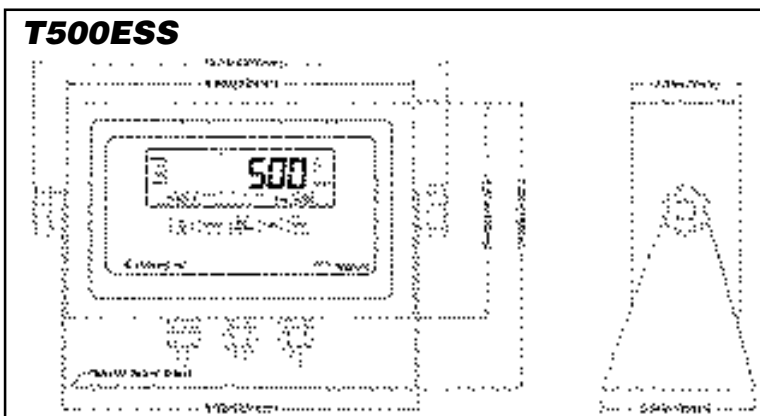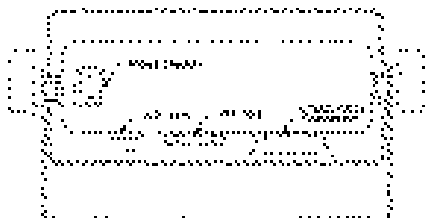

T500 & T500E

The Totalcomp T500 Series is a line of general purpose indicators made to provide superior results at an economical price. The compact size, easy set-up, and wall or table mountable swivel stand make these units great as floor or deck scale indicators and perfect for any type of tank weigh system.

Load Cell Excitation:

+10 VDC

Load Cell Current:

Drives up to four 350 load cells

Analog Signal Input Range:

0.2 mV/V min to 3.0 mV/V max

Analog Sensitivity:

0.4 V/grad, minimum

1.0 V/grad recommended minimum

for Legal-for-trade

A/D Conversion Rate:

Up to 25 meas/sec

A/D Resolution:

Up to 260,000 internal counts

Display:

0.6", 6 Digit LED Display

Display Resolution:

Up to 50,000 external grads, selectable

Key Functions:

lb/kg, Zero, Net/Gross, Tare, Print

Annunciators:

Gross, Net, kg, lb, center of zero, stable, tare, negative

Serial Port:

Full duplex RS-232 format

Power Requirements:

12 VDC, 650 mA Wall Adapter, included

Power Consumption:

200 mA + 30mA/350 load cell

Operating Temperature:

- 10°C to 40°C (14°F to 104°F)

NIST Classification:

NTEP C.O.C.#96-028, Class III at 5,000 divisions

TOTALCOMP LIMITED WARRANTY

Totalcomp warrants this products to be free of defects in materials and/or workmanship and suitable for the purpose(s) intended as outlined on this sheet. This warranty is effective and shall cover the purchaser for one year from the date of shipment from our plant. If this product is found to be defective by our inspection in accordance with the above listed criteria, we will replace or repair it at our expense. For warranty service, please obtain a return authorization number from us and return the item, shipping prepaid, with a written description of the problem. We will respond promptly with the results of our evaluation.



Totalcomp®

Scales & Components

99 Reagent Lane

Fair Lawn, NJ 07410

Fax (201) 797-2287

Toll Free Fax (888) 797-2288

Phone (201) 797-2718

Toll Free Phone (800) 631-0347

Email sales@totalcomp.com

Website www.totalcomp.com